

TremLock® Soffit Panel

Concealed fastener soffit and wall panels

FEATURES

- Ventilated Option

BENEFITS

- Allows for airflow



DESCRIPTION

TremLock Soffit panels are factory roll formed 24 or 29 gauge Galvalume® steel, zinc coated by hot-dip process per ASTM A792/A792M. The Galvalume panel is coated with Kynar 500® / Hylar 5000®. Refer to color chart for available colors.

BASIC USES

TremLock Soffit panels are intended for use as a soffit panel only. TremLock Soffit panels are not intended for use in roofing or mansard applications. These panels can also be vented to allow for airflow and under eave ventilation.

SYSTEM DESIGN

TremLock Soffit Panels are designed for soffit applications. The Soffit panels have coverage of 12" for vented or non vented panels a height of 3/8" with major rib spacing 6" oc. minimum length of 6" and maximum length of 4ft. The vented soffit panel has a 10% net free area.

FINISH/COLOR



Acrylic Coated Galvalume
Fluoropolymer (Kynar 500 PVDF Resin Based)
Siliconized Polyester (16" 29 ga.)
Oil canning is inherent in all metal panels and is not cause for panel rejection

APPLICATION


TremLock Soffit panels are typically installed over solid substrate or open framing under eave.

PANEL PROFILES


Soffit Profiles:

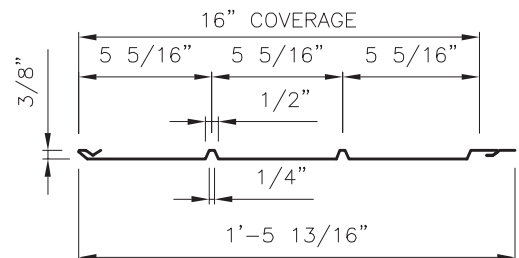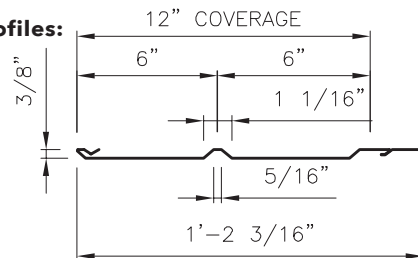

Seam:



Vented Panels 12" and 16" (10% Net Free Air):

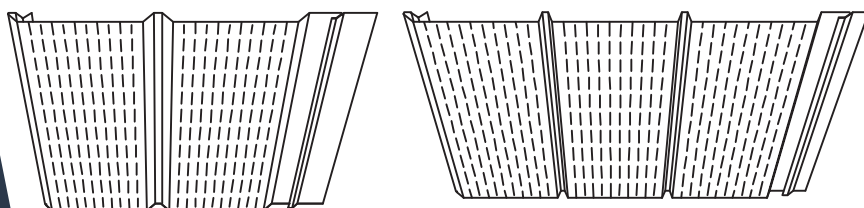

PANEL PROFILES CONTINUED

TESTING


MAINTENANCE

PRECAUTIONS

TECHNICAL SUPPORT

TremLock® Soffit Panel

Non-Vented Panels 12" and 16":

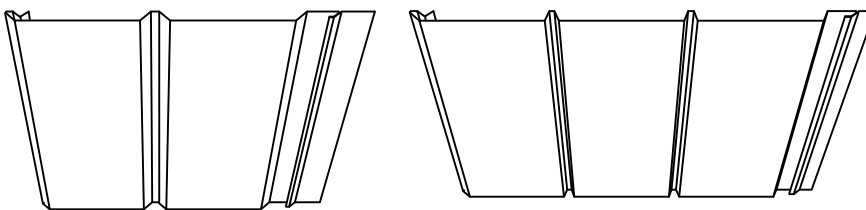

TITLE OF TEST	TEST METHOD
Uplift	ASTM E1592

Your local Tremco Roofing sales representative can provide you with effective maintenance procedures which may vary, depending upon specific conditions. Periodic inspections, early repairs and preventative maintenance are all part of a sound roof program.

Users must read container labels and Safety Data Sheets for health and safety precautions prior to use.

Your local Tremco Roofing sales representative, working with the Technical Service Staff, can help analyze conditions and needs to develop recommendations for special applications.



www.tremcoroofing.com
3735 Green Road
Beachwood, Ohio 44122
1.800.852.6013

50 Beth Nealson Drive
Toronto, Ontario M4H 1M6
1.800.668.9879

Tremco is a US Registered trademark of Tremco Incorporated.
The information provided on this data page supersedes all previous data concerning this product and its application.
The Statements provided concerning the materials shown are intended solely as a general guide for material usage and are believed to be true and accurate. Since the manner of use is beyond our control, Tremco DOES NOT MAKE NOR DOES IT AUTHORIZE ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PURPOSE, OR ANY OTHER WARRANTY, GUARANTEE OR REPRESENTATION, EXPRESSED OR IMPLIED, CONCERNING THIS MATERIAL EXCEPT THAT IT CONFORMS TO TREMCO'S PRODUCT SAMPLE. Buyer and user accept the product under those conditions and assume the risk of any failure, injury of person or property and loss or liability resulting from the handling, storage or use of the product, whether or not it is handled, stored, used in accordance with directions or specifications. UNDER NO CIRCUMSTANCE SHALL TREMCO BE LIABLE FOR CONSEQUENTIAL OR INCIDENTAL DAMAGES ARISING FROM ANY BREACH OF WARRANTY. IN ALL CASES, TREMCO'S LIABILITY IS LIMITED, AT TREMCO'S OPTION, TO THE REPLACEMENT OF GOODS, OR THEIR VALUE, PROVEN TO BE DEFECTIVE IN MANUFACTURING.